Techstream Lite Kit Installation Instructions for Mongoose-Plus and MongoosePro Vehicle Interface Modules (VIMs)

Table of Contents

Installing Mongoose-Plus and MongoosePro Software from Techinfo Website 2

Installing Agent Lite from Techinfo Website 6

Downloading & Installing GTS+ Software 10

Launching GTS+ & VIM Selection 13

Connecting to Vehicle to Verify Techstream Lite Operation 14

Techstream Lite Technical Support Information 15

Installing Mongoose-Plus and MongoosePro Software from Techinfo Website

Required to proceed:

- PC with Windows 10 (32-bit or 64 bit)
- PC with MS-Edge, Google Chrome, or Firefox 21.0 or later version.
- PC configured for access to the Internet.

Perform the following:

1. Go to https://techinfo.toyota.com, enter **User Name** and **Password** then click **Login**.

2. Click on **TIS → Diagnostics → ScanTool**

   In the Techstream Lite section, click on **Mongoose-Plus MFC3**, **MongoosePro MFC2** or **MongoosePro MFC** to display the available software versions. Select the applicable software link to download the installation file.

   NOTE: The software versions shown are for reference, as updated versions may be available.

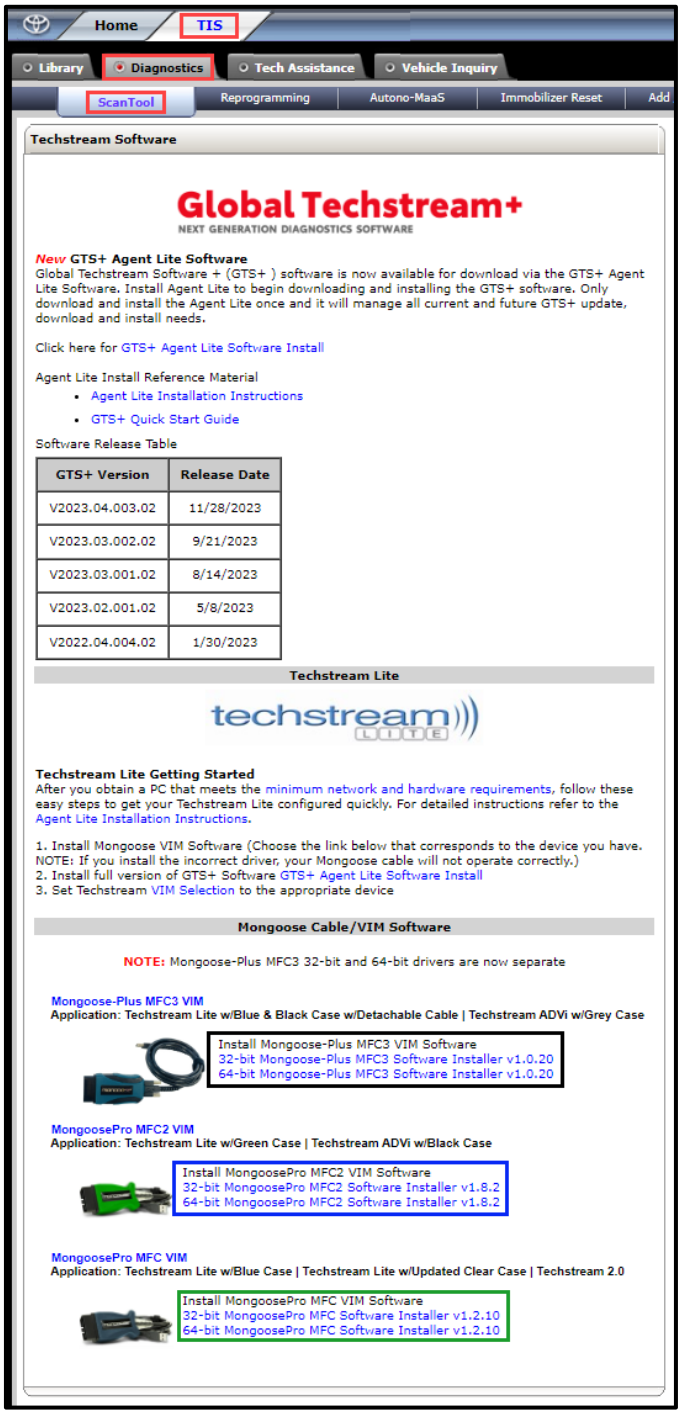

3. From the Downloads folder on your PC, double click on the downloaded installation file.

   NOTE: mongooseplus_mfc3_0404_0500_setup.exe shown as an example. Your content may differ depending on the downloaded version.

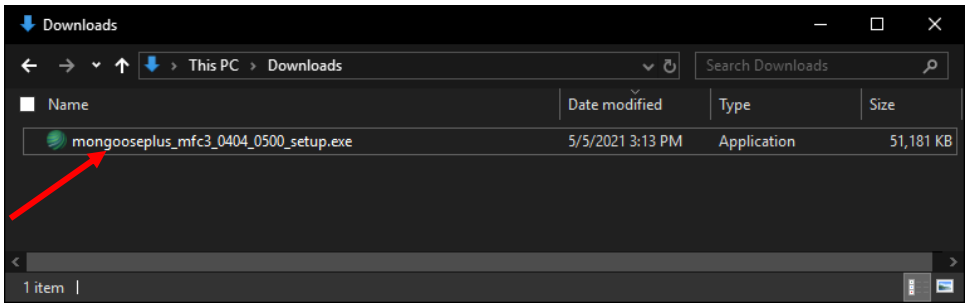

4. A setup screen will appear as shown. Check the box labeled "**I accept the terms in the license agreement**" then click **Install**.

   NOTE: Mongoose-Plus MFC3 installation screen shown as an example. MongoosePro MFC2/MFC installation screens differ but follow a similar setup procedure.

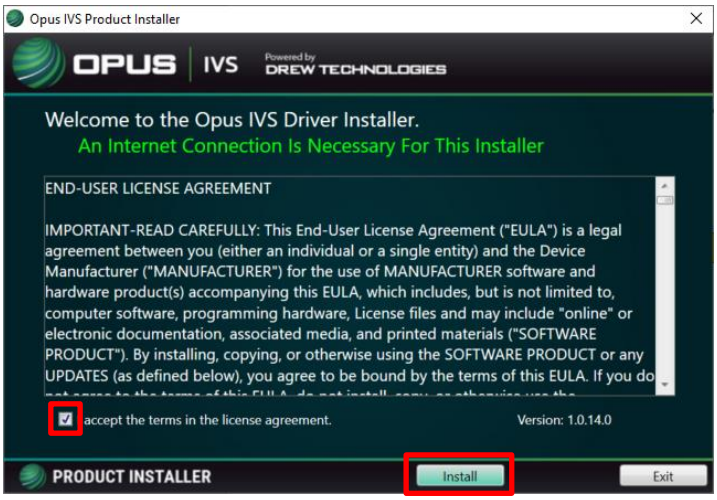

5. You will be instructed to attach the Mongoose-Plus or MongoosePro device to the computer *after* the installation is complete. Click **Exit** to complete the setup

   NOTE: Mongoose-Plus MFC3 installation screen shown as an example. MongoosePro MFC2/MFC installation screens differ but follow a similar setup procedure.

   NOTE: Some devices require activation. If prompted, complete device activation for proper operation and functionality.

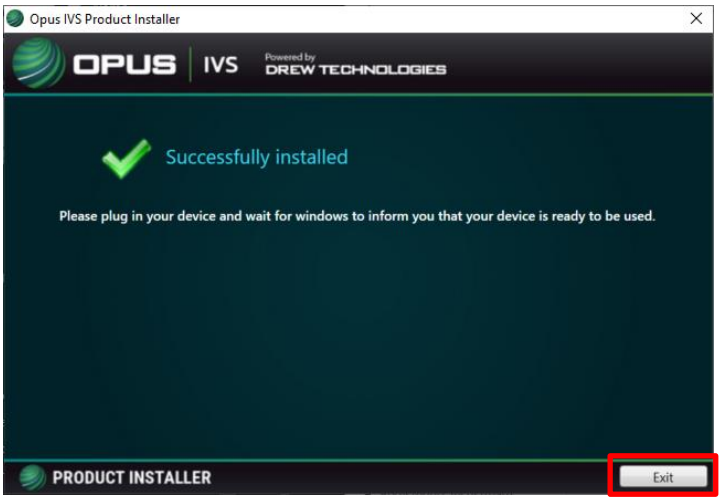

Installing Agent Lite from Techinfo Website

Perform the following:

1. Go to https://techinfo.toyota.com, enter **User Name** and **Password** then click **Login**.

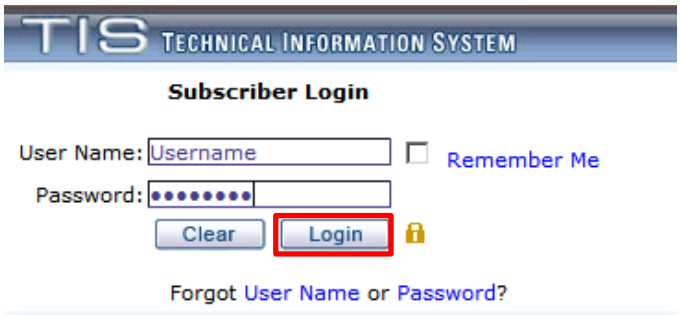

2. Click on **TIS → Diagnostics → ScanTool**

   In the Techstream Software section, select **GTS+ Agent Lite Software Install** to download the Agent Lite installer.

   NOTE: The most recent GTS+ version is displayed in the table; below is only for reference.

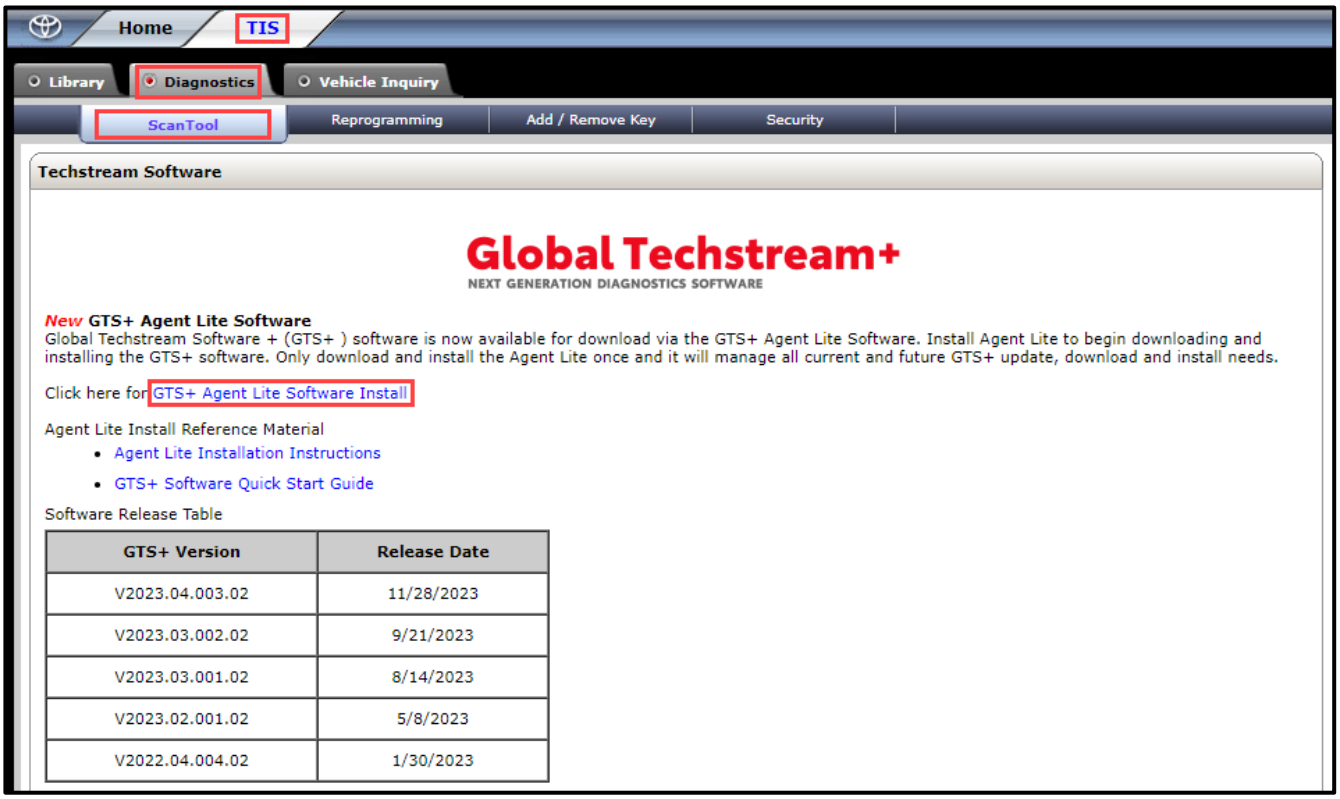

3. From the Downloads folder on your PC, double click on the downloaded Agent Lite file.

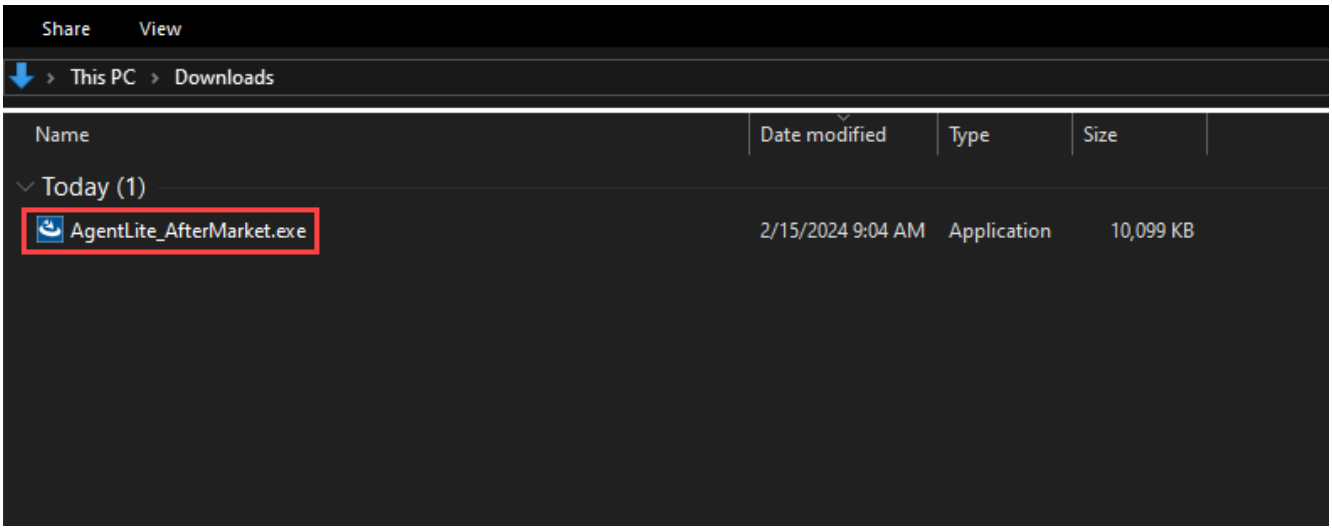

4. Choose setup language and click **Next** to continue.

5. Click **Next** again to continue.

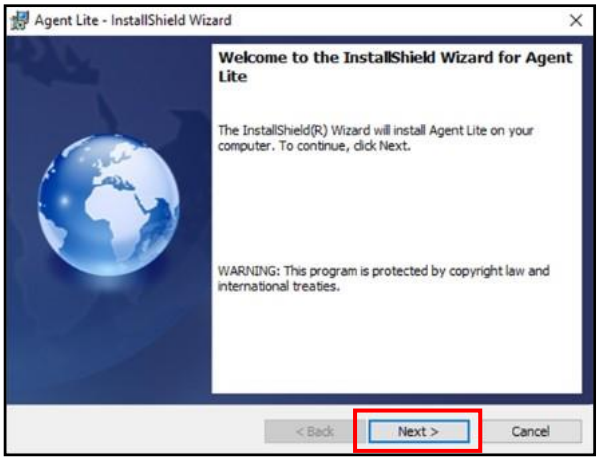

6. Select **Next**.

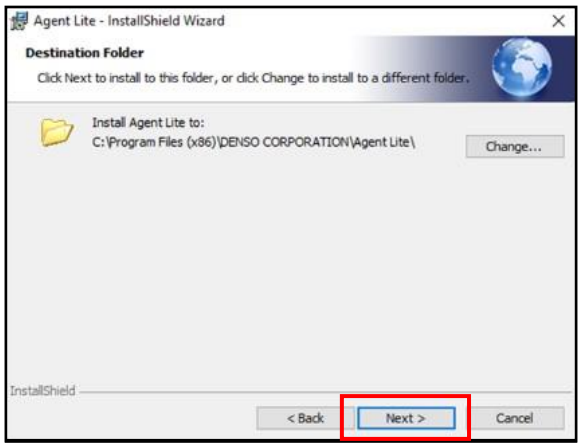

7. Select **Install**.

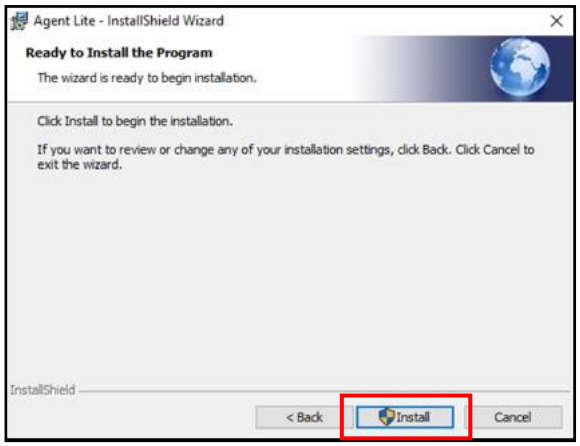

8. Agent Lite program will begin installing.

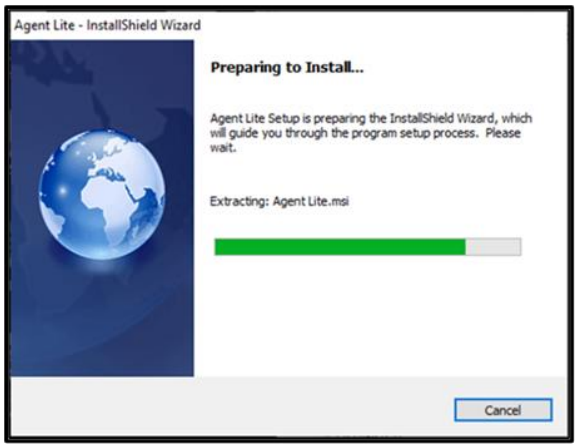

9. Click **Finish** to complete the installation

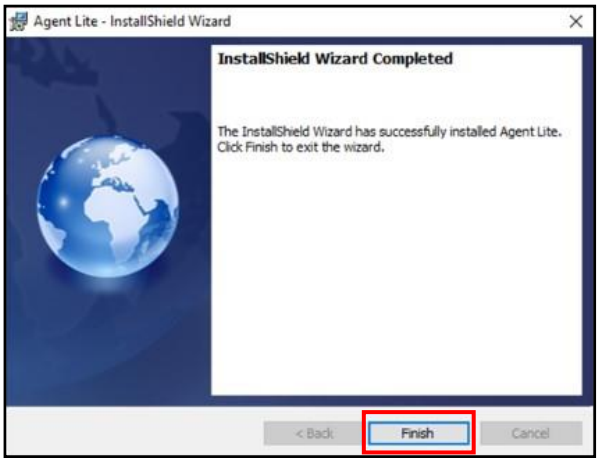

Downloading & Installing GTS+ Software

After Agent Lite is installed, the following prompt will be displayed at the bottom, right-hand corner of the screen:

1. Select Yes, then a web browser window will open.

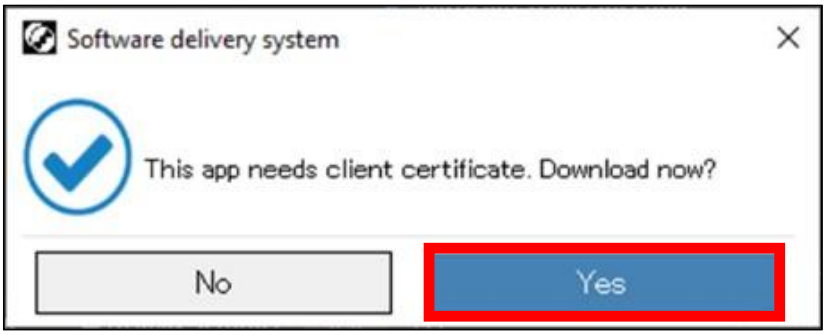

2. Login using your Techinfo credentials.

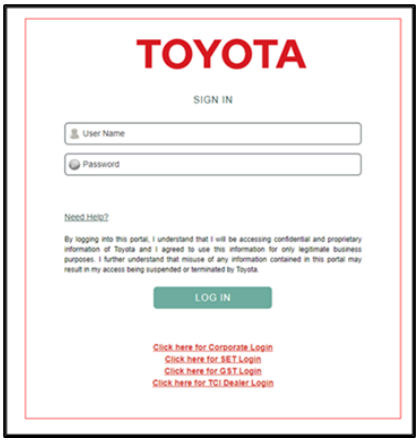

3. After the login is successful, select **Open AgentLiteSsoLogin.**

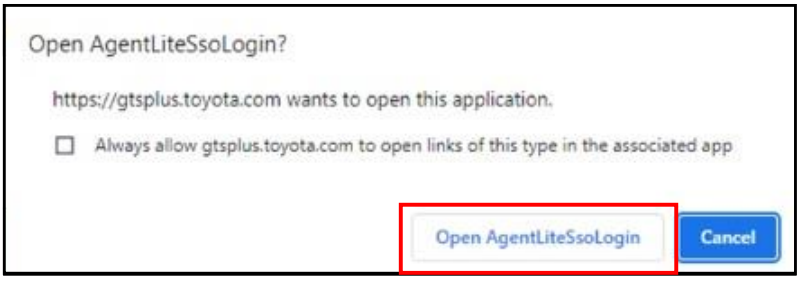

4. After about one minute a new window will open. This is the Agent Lite home screen.

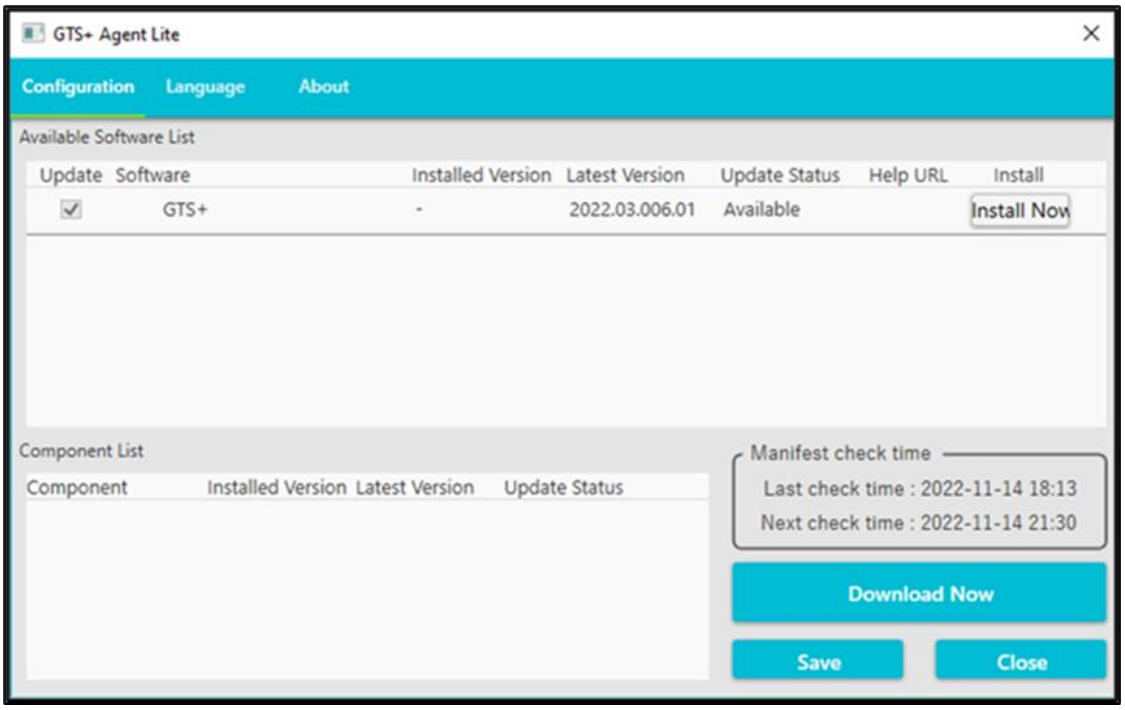

5. To download the latest GTS+ software, select the **Install Now** button. Then select **Yes** in the popup.

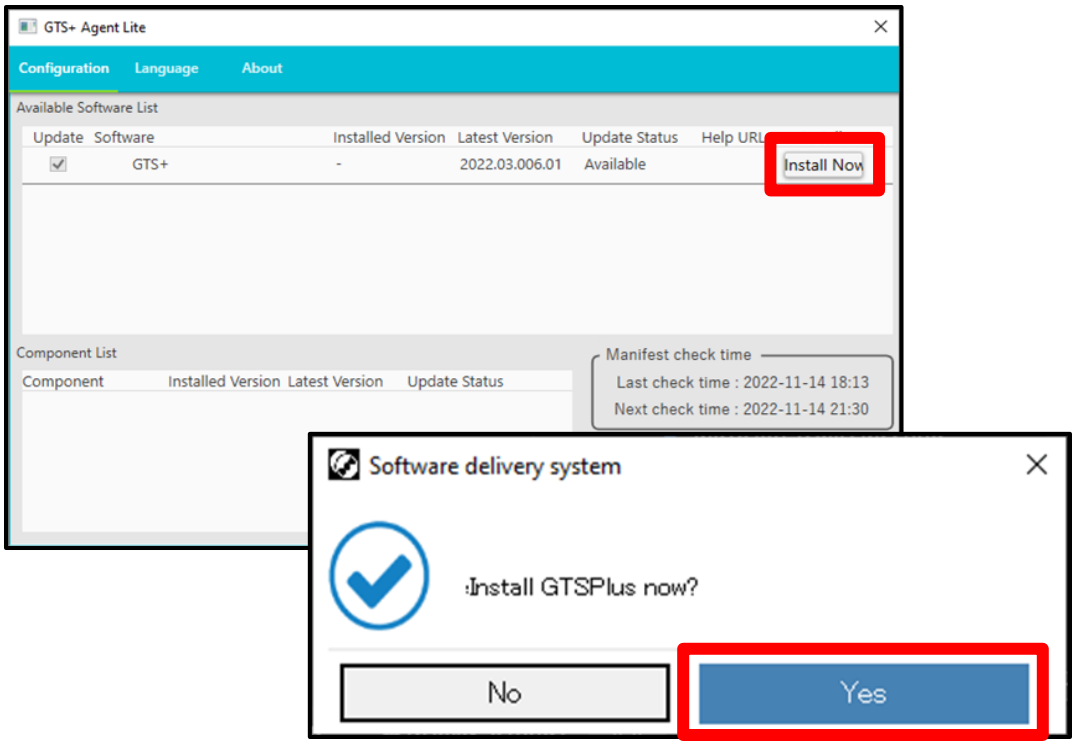

6. Once Install Now is selected, Agent Lite will uninstall the currently installed version of GTS+ then download the latest version available. If GTS+ is not currently installed on the PC, the latest GTS+ version will begin downloading.

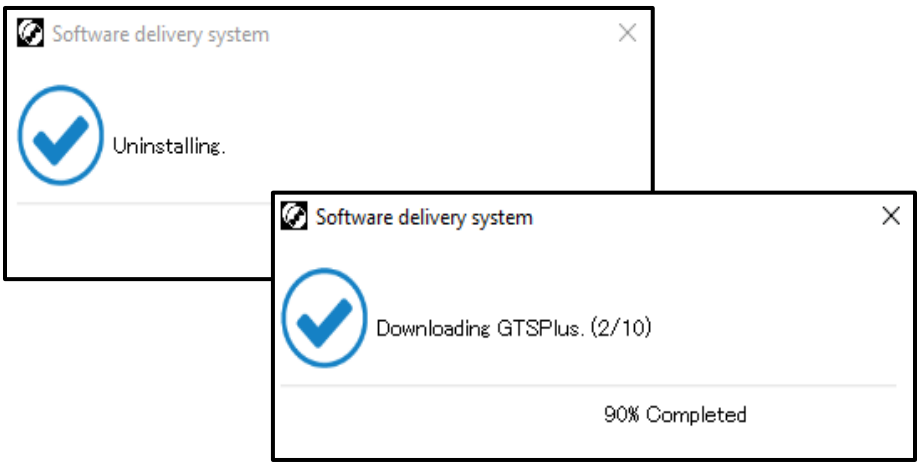

7. Once the software is downloaded completely, you will be asked if you want to install GTS+ now. Select **Yes**.

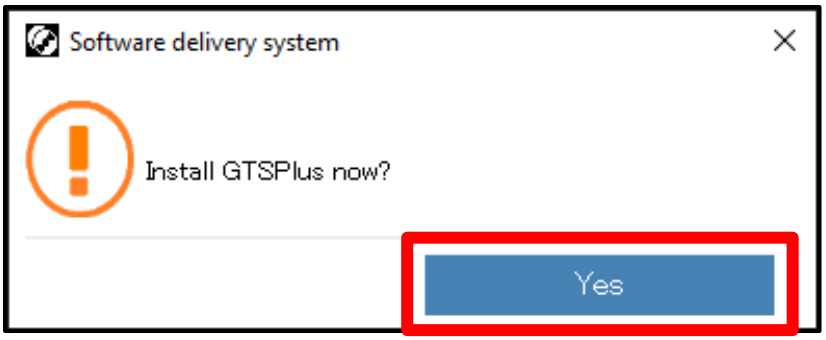

8. Agent Lite will begin installing GTS+. This may take up to 15 minutes. Once installed, you will have a GTS+ icon on the desktop. Select **Please Reboot Now** when the popup appears. If a PC reboot is not prompted, it is recommended. Note: There is no progress indicator during the installation step.

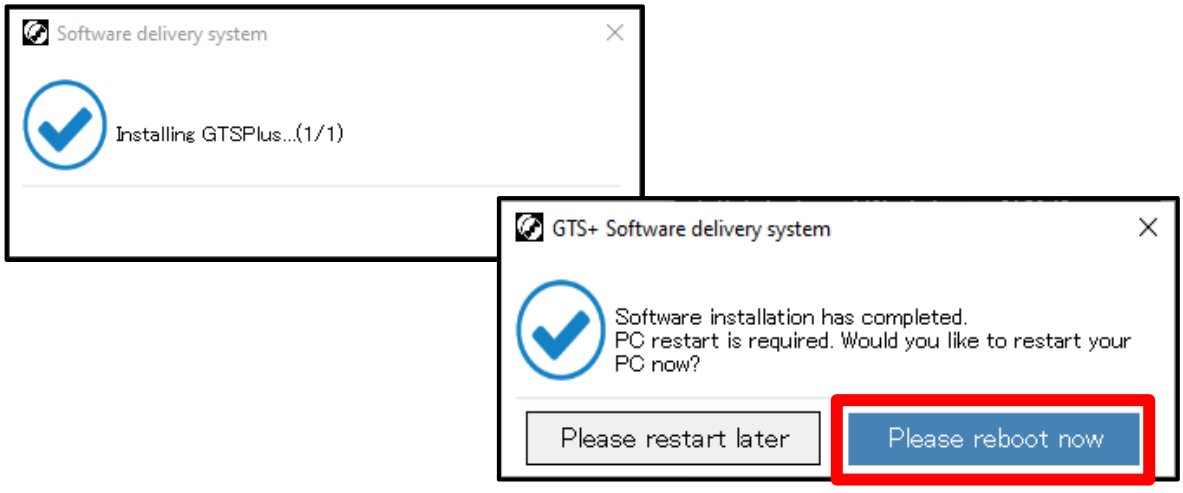

Launching GTS+ & VIM Selection

1. Double click the GTS+ Icon on the desktop, it will open a browser based on Windows Default Browser Setting (use Chrome, Edge, or Firefox).

2. Select appropriate Country and User Type (public User), then click **Server Login**.

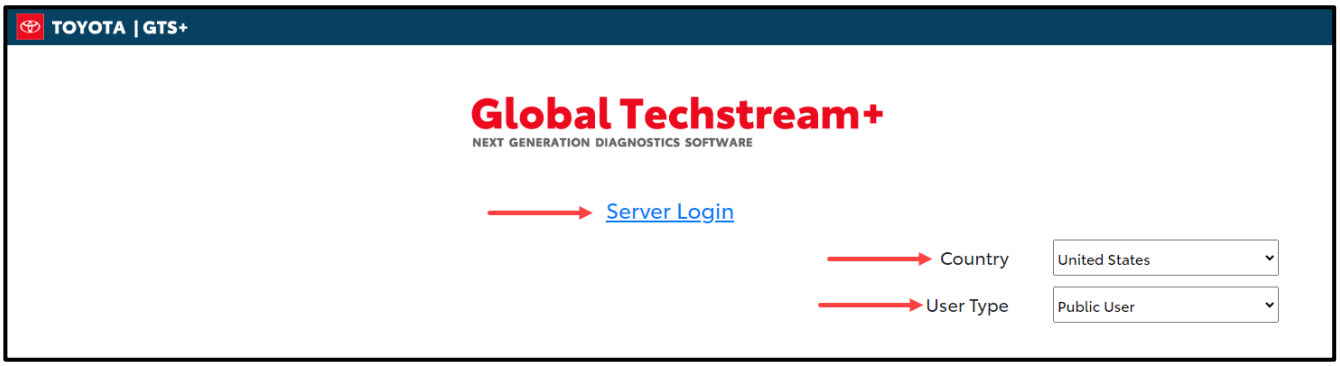

3. At Initial login to a new PC, you will receive a user information message. Proceed with the on-screen prompts and set your user preferences as desired.

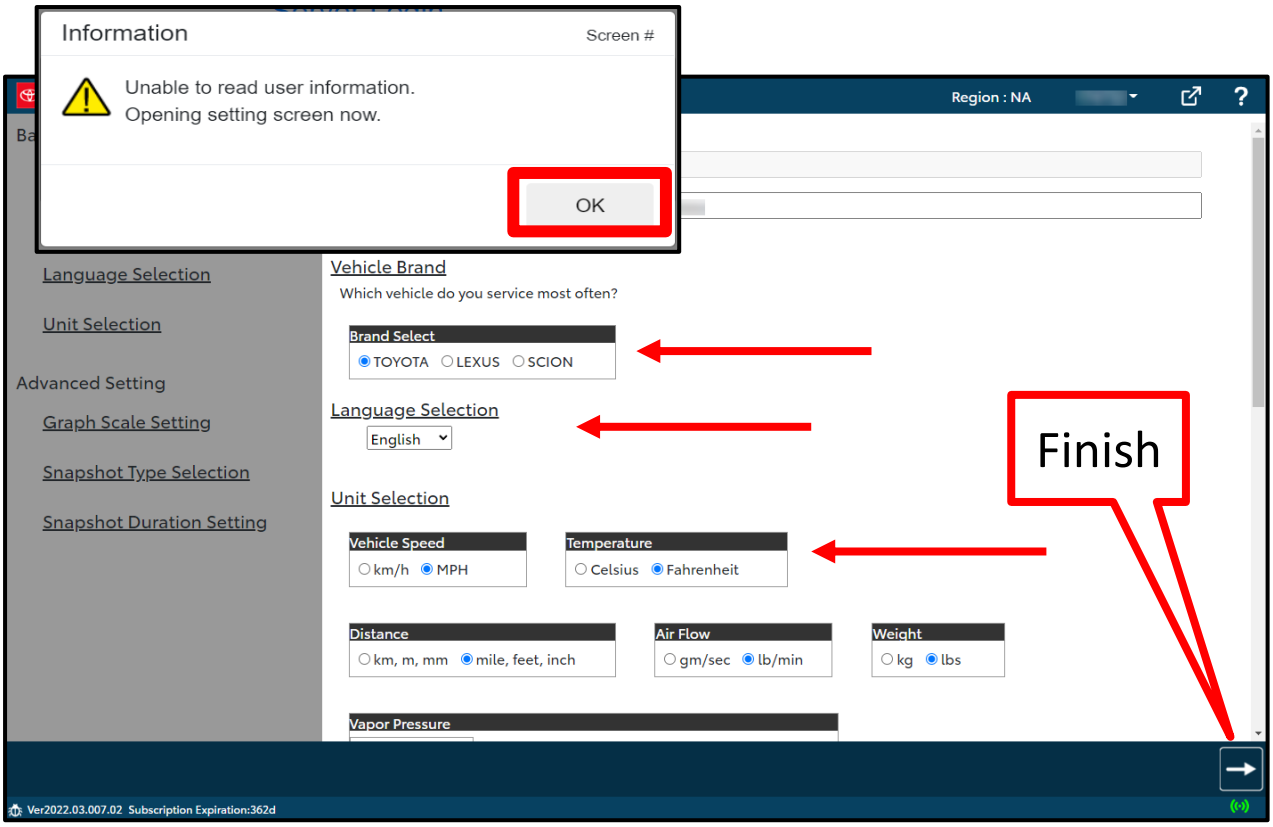

Connecting to Vehicle to Verify Techstream Lite Operation

Perform the following:

1. Connect **Mongoose-Plus MFC3**, **MongoosePro MFC2** or **MongoosePro MFC** device to PC via USB port.
2. Connect **Mongoose-Plus MFC3**, **MongoosePro MFC2** or **MongoosePro MFC** device to vehicle's **DLC3 (OBD-II)** port.
3. From the GTS+ main menu, click **Connect to Vehicle.**

4. Vehicle information should be prepopulated as in the example below. Select the appropriate vehicle **Option** and click **Next**.

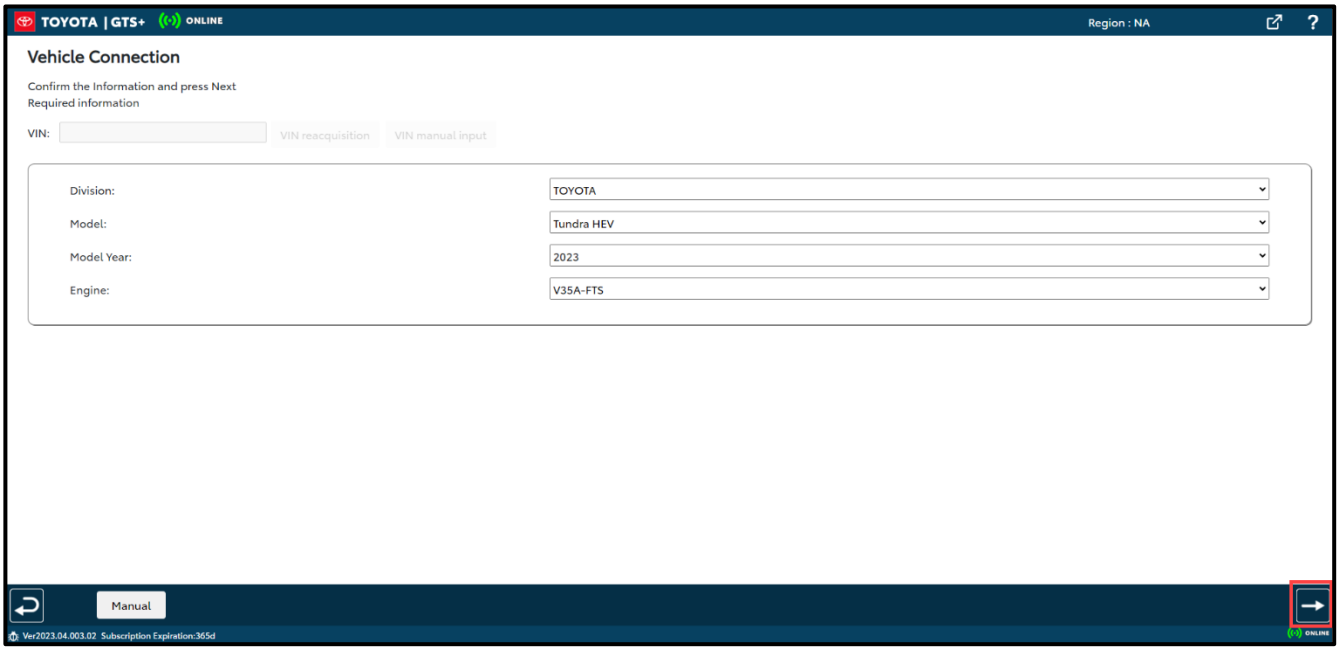
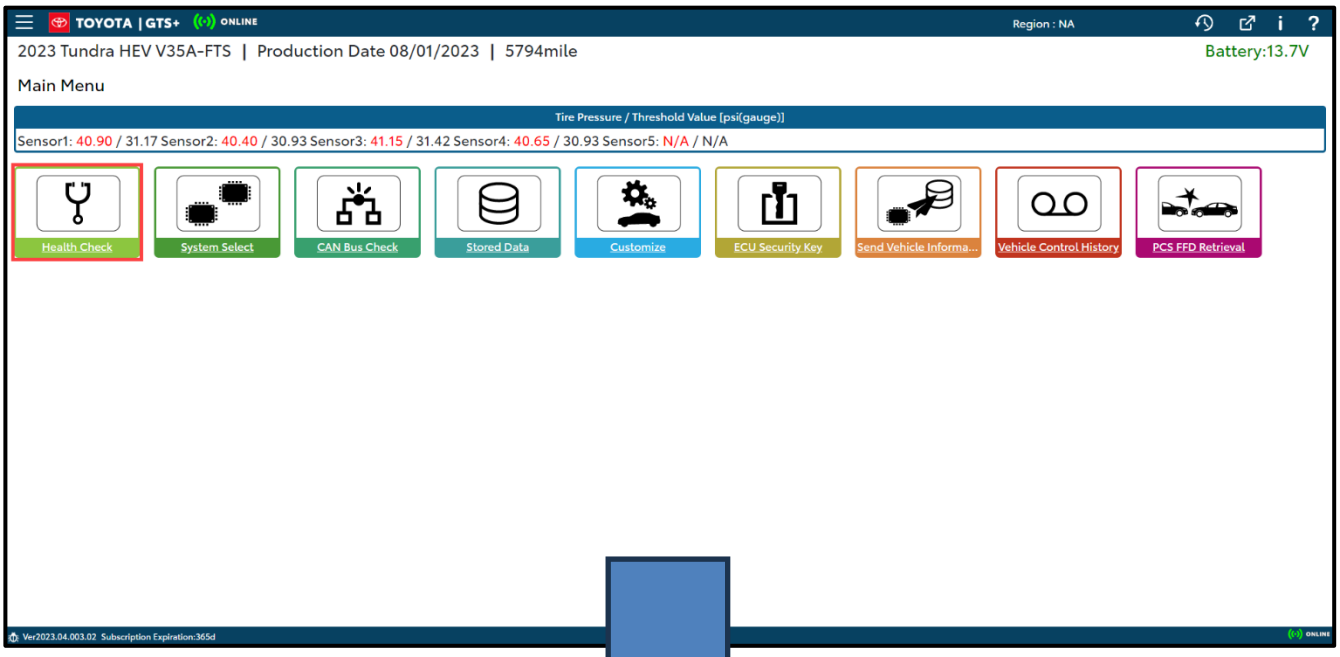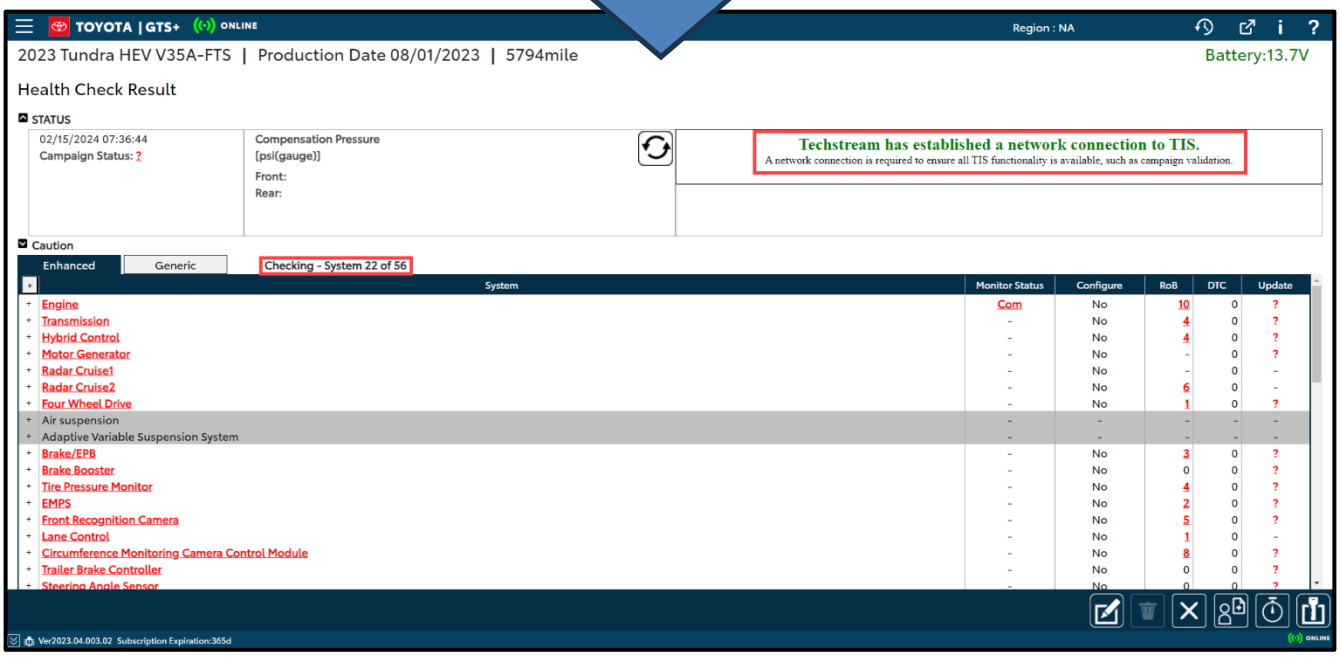
5. From the **Main Menu**, select the Health Check button. If GTS advances to the Health Check screen and you see a list of ECUs, communication has been established and you are done!